CORNING

12 - 864-Fiber Armored and Non-Armored Indoor/Outdoor Environmentally Resistant Pulling Grip

004-220-AEN-EMEA, Issue 3

related literature | Search www.corning.com/opcomm. Click on “Resources.”	
003-794	Instruction, EDGE™ Solution

Install housings per instructions in Corning’s Standard Recommended Procedure 003-794.

1. Tools Required

- Scissors
- 3/16-in hex wrench

2. Cable Preparation

NOTE: If straps are present, cut them as shown in Illustration 2, then slide tube out.

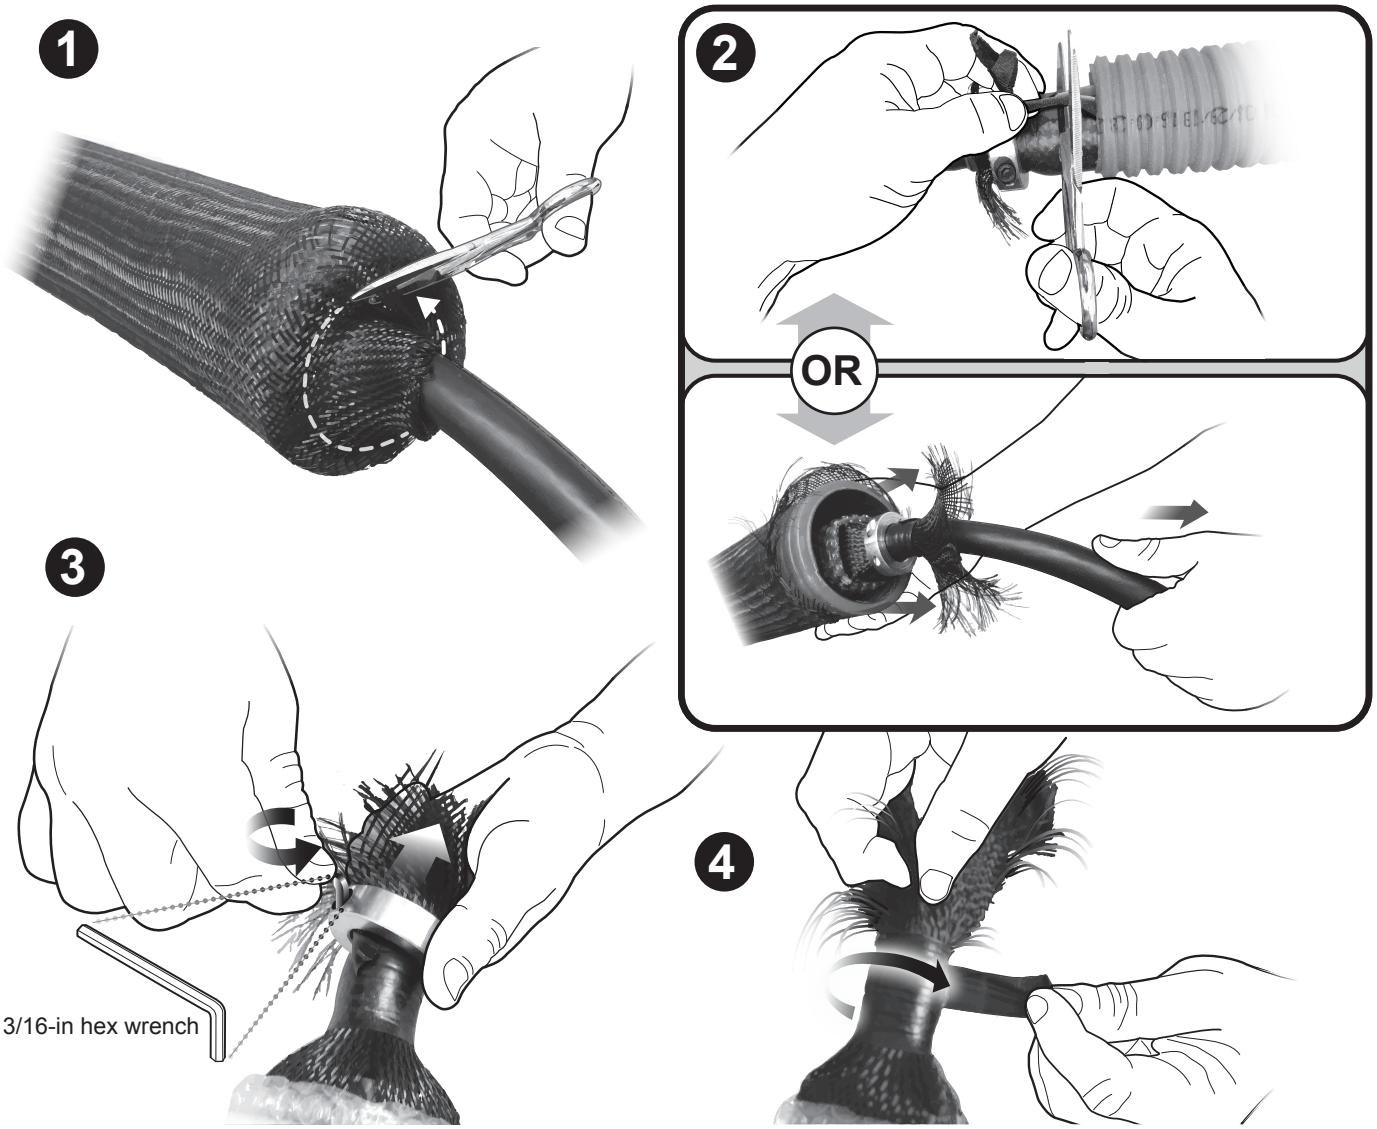

5

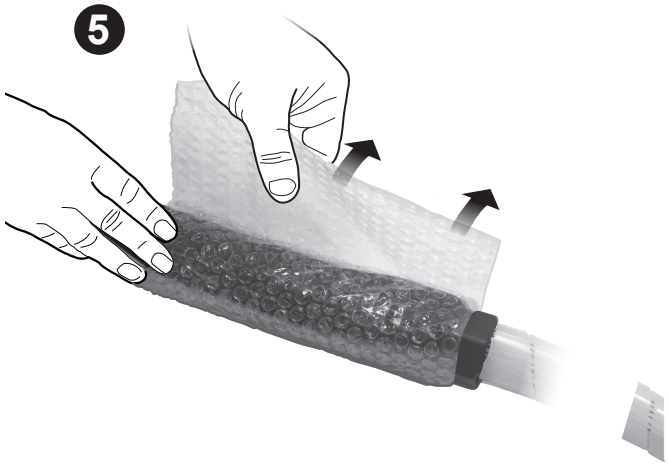

6

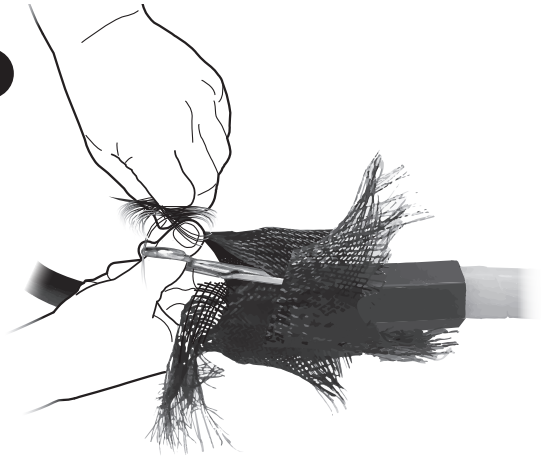

7

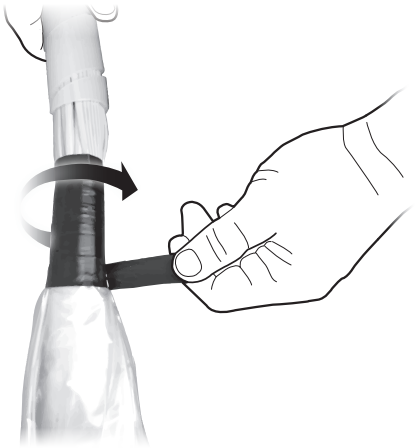

8

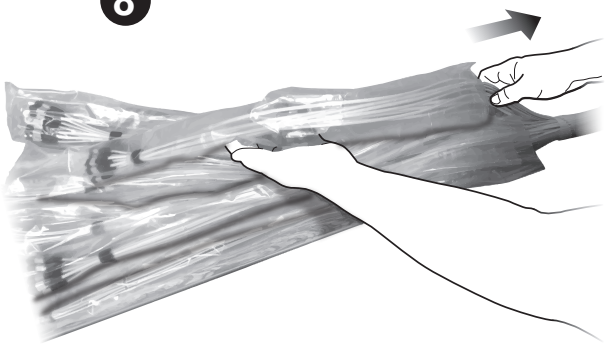

9

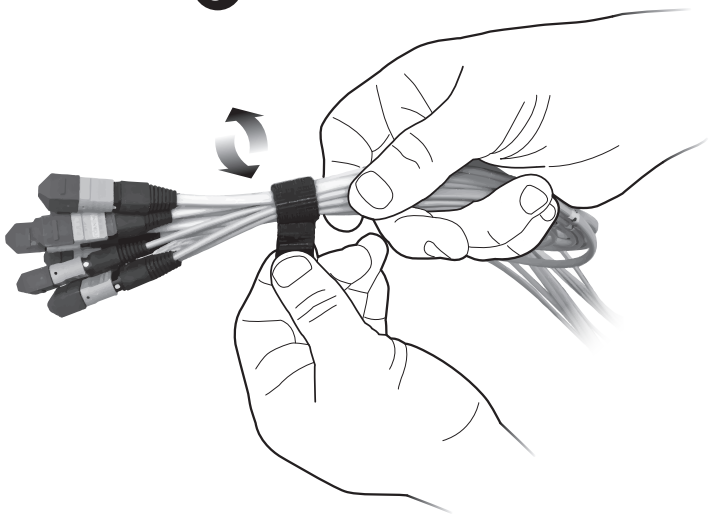

NOTE: Remove any additional protection material that may be present depending on trunk type and fiber count.

3. Cable Installation

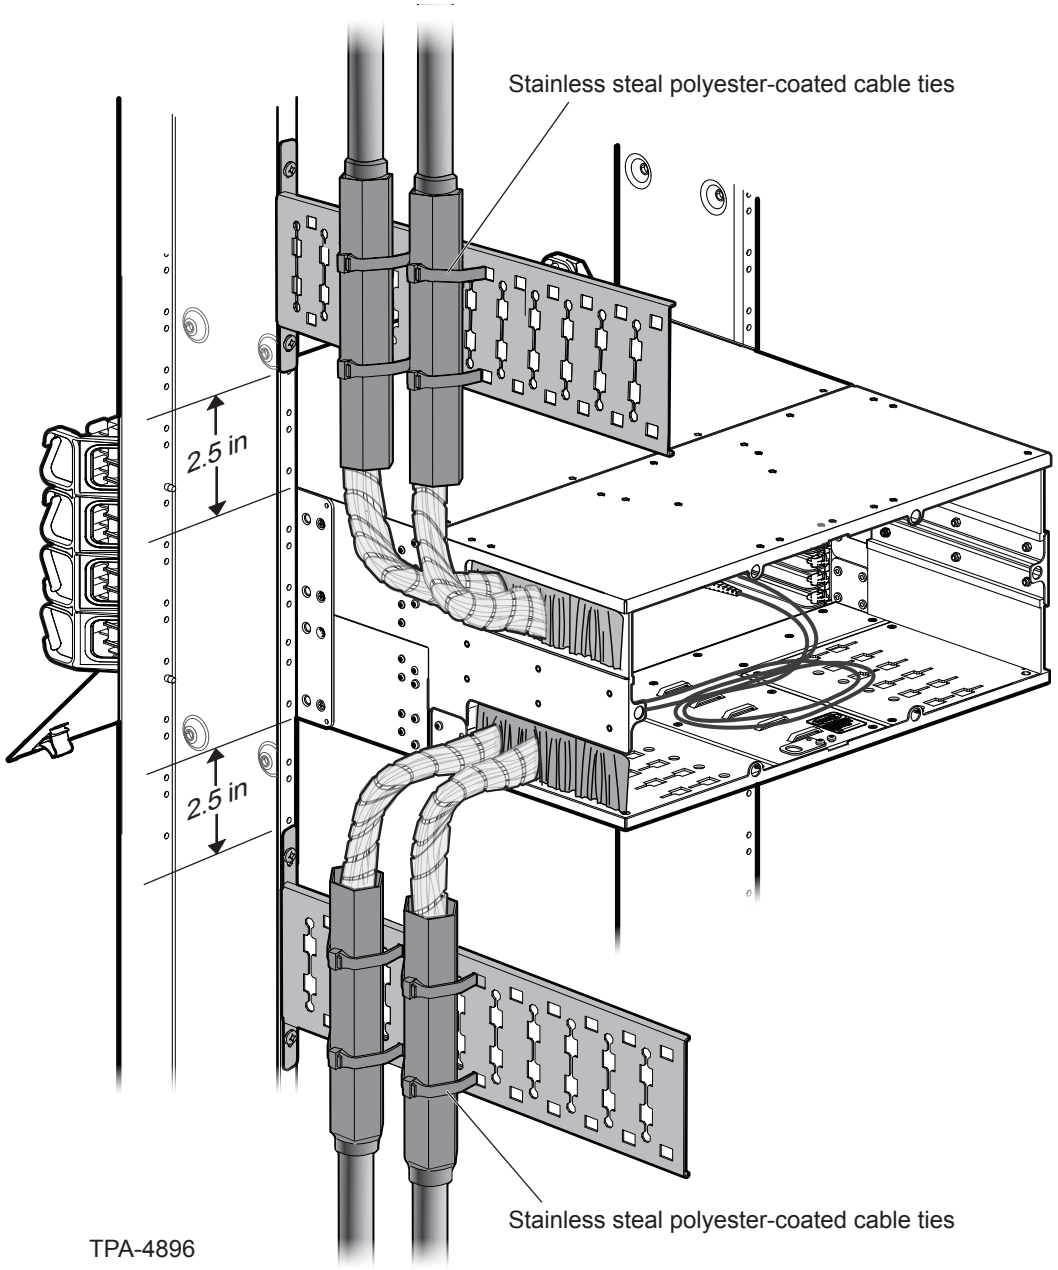

TPA-4896

4. Complete Installation

Search for master installation instruction 003-794 on www.corning.com/opcomm to complete installation of connectors and jumpers.

Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

Corning Optical Communications reserves the right to improve, enhance, and modify the features and specifications of Corning Optical Communications products without prior notification. A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2014, 2018 Corning Optical Communications. All rights reserved.